


PRESTIGE 420S

Overall length	41'5"	12,64 m	
Overall beam	12'11''	3,95 m	
Draft	2'7"	0,79 m	
Light displacement	21 070 Lbs	9 557 kg	
Fuel capacity	291 US gal	1 100 L	
Water capacity	107 US gal	406 L	
Hot water heater capacity	11 US gal	40 L	
Accomodation	6		
Category	B-9/C-11		
Engine	Volvo 2 x IPS 500	Volvo 2 x IPS 500 - D6 - 370 HP	





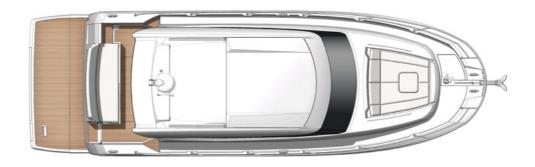

ENGLISH / Standard equipment

Deck

- Stainless steel stem head fitting with anchor roller
- Anchor stop
- · Electric windlass with wired remote in anchor locker (12V)
- Anchor locker with dedicated space for fender storage
- Stainless steel cleats (6)
- · Stainless steel handrails
- Stainless steel rubrail
- · Foredeck sunpad area

Bathing platform

- Bathing platform
- Hot and cold shower
- Stainless steel bathing ladder

Cockpit

- · Sofa seating area
- · Access hatch to the engine room with gas struts
- Transom safety gate
- 2 marine stereo speakers
- Overhead LED lighting

Sport Top

· Opening electric GPR roof

Interior helm station

- · Helm console with engine throttles and maneuvering joystick, full engine instrumentation, compass and cup holders
- · Helm seat with pivoting backrest
- Opening window
- · Windscreen wipers with intermittent setting and washers
- Windscreen demister
- USB plugs
- Horn

Saloon

- U-shaped sofa seating
- · Varnished table on stainless steel base
- Storage cabinet / TV stand to starboard
- · Manual opening window to port
- Manual opening window to starboard • Side window pleated blinds
- · Removable carpet set
- · Radio / CD / MP3 with Bluetooth in saloon
- 2 stereo speakers

- Galley
 Stainless steel sink
- Mixing tap
- 2 -burner gas cooktop
- Corian worktop
- Fridge dual voltage (174L / 46 US gal)
- Freezer dual voltage (16L / 4 US gal)
- Waste bin
- · Storage drawers and cupboards
- · Wooden flooring

Master stateroom

- Double bed (197 cm x 150 cm / 6'5" x 4'11")
- · Large closet with shelving
- · Storage cabinet
- Panoramic side windows with blinds and opening ports
- Removable carpet set
- AC and USB plugs
- En suite bathroom
- Solid countertop and washbasin
- · Separate shower compartment
- AC plug
- · Opening port

VIP stateroom

- Double bed (200 cm x 175 cm / 6'6" x 5'8")
- Large closet with shelving
- Large side windows with blinds and opening ports
- Opening deck hatch with shade / insect screen
- Removable carpet set
- AC and USB plugs
- En suite bathroom
- · Solid countertop and washbasin
- Separate shower compartment
- AC plug
- Opening port

Propulsion

- Joystick system for IPS
- IPS Nibral twin props
- Electronic power steering
- Electronic engine controls and throttles at each helm
- Single Lever, Cruise Control, Trim Computer and Low Speed functions
- Bronze seawater strainers
- Forced air ventilation system for engine room

Electrical system

- Battery bank (12V) Engine (240 A/h)
 Battery bank (12V) House (240 A/h)
- Battery bank crossover switch at helm
- · Tactile graphic display for battery levels, AC sources, lighting and tank levels
- Remote battery switches
- · Centralized distribution and breaker boxes for AC and DC systems
- AC shore power system
- Battery charger (40A 12V)
- LED interior and exterior lighting
- · AC plugs in each cabin and in the galley and saloon

Fuel system

- · 2 fuel tanks (aluminum) with interconnection valves -(1100L / 291 US gal)
- Fuel fills to port and starboard with crossover valve
- · Remote shut-off valves in aft companionway

Water system

- Freshwater tanks (406L / 107 US gal)
- Hot water heater (40L / 11 US gal)
- Freshwater pressure pump
- Grey water sump pump with automatic discharge
- Holding tank (120L / 32 US gal)
- Overboard discharge pumps for holding tanks with macerator function and deck pump-out
- Automatic bilge pumps with high water alarm (2)
- Manual bilge pump

Systems

Fire extinguishers in engine room with manual pull handle (FM200)

Construction

- Hand-laid GRP hull
- · Hand-laid GRP deck with counter molding
- Isophthalic gelcoat
- Osmosis barrier

Additional standard equipment

- User and Owner's manuals
- · Captain's briefcase with set of manuals

North american specifications

- Chilled water air conditioning incorporating reverse cycle heating (28 000 BTU)
- 7.5 kW generator with underwater silent exhaust
- Galvanic Isolator
- · Wooden flooring in main saloon